



DuPont™ Cyrel® EASY ESE

Built in flat top dot digital plate with an engineered surface

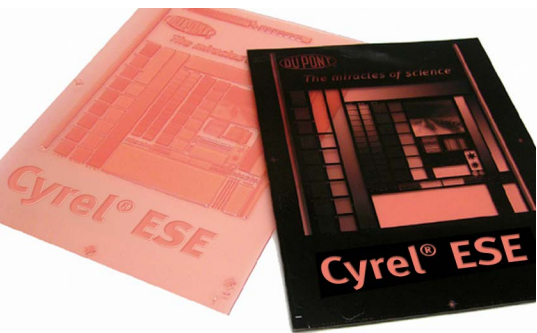

DuPont™ Cyrel® EASY ESE

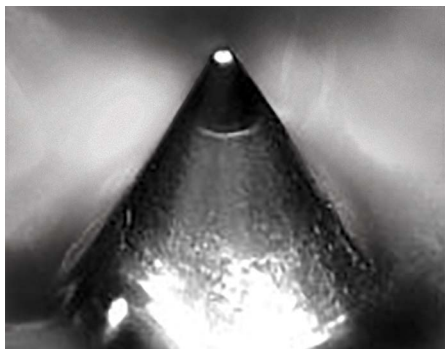

Cyrel® EASY with Built-In Flat Top Dot



Download latest version

[DuPont Packaging Graphics](#) continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates ([analogue](#) and [digital](#)), [Cyrel® platemaking equipment](#), [Cyrel® round sleeves](#), Cyrel® plate mounting systems and the revolutionary [Cyrel® FAST thermal system](#).

DuPont™ Cyrel® Systems: Higher quality at high speed.

DuPont™ Cyrel® EASY ESE is the built-in flat top dot digital plate designed for the highest quality printing of halftones, linework and solids. Cyrel® EASY ESE has an engineered surface for higher solid ink density without micro-screening.

DuPont™ Cyrel® EASY ESE

Applications

- Flexible packaging
- Tag and Label

Product Features

- A plate that is based on a completely new polymer that delivers higher ink transfer and resolution.
- Ideally suited for extended gamut printing.
- The flat top dot shape compresses less, providing a more consistent and stable print surface.
- Higher latitude and better uniformity reduces press make ready time.
- The smaller shape flat top dot allows higher resolution and a very wide tonal range for crisper sharper printing results.
- The EASY ESE's standardised, engineered surface allows higher solid ink density and lower graininess.

- No micro-screening needed, allowing for higher Cyrel® Digital Imager (CDI) productivity.
- The simplified workflow reduces errors in the exposure/laminate step.
- Recommended for printing on smooth surfaces and film substrates.

Printing Ink and Solvent Compatibility

Cyrel® EASY ESE plates offer excellent compatibility with solvent-based, water-based, and UV inks.

Process of Use

Expose the plate through the back to establish the floor and maximise sensitivity. Back exposure varies according to relief required. Remove the protective coversheet, and image the plate with the CDI. Expose the front of the plate surface. Process the plate in the Cyrel® solvent processor to remove unexposed polymer. Finish the plate in a light finisher to eliminate surface tackiness.

DuPont™ Cyrel® EASY ESE

Built in flat top dot digital plate with an engineered surface

Mounting

Microdot mounting devices are recommended for mounting Cyrel® EASY ESE plates. The double sided adhesive should first be applied to the cylinder or sleeve—not the plate—to ensure easier and precise laydown. The polyester base will maintain accurate register even with large plates.

Storage – Raw Material

Store unexposed plates in a cool area (4–32°C, 40–90°F), away from direct sources of heat. Humidity control is not required. Cyrel® EASY ESE is foam interleaved to provide maximum protection of the plate after manufacture and during transportation and storage. Plates should be stacked flat. Plates should not be exposed to direct sunlight or excessive white light. Continuous exposure to very high ozone concentrations should be avoided.

Handling – Raw Material

Like all photopolymer plates, Cyrel® EASY ESE plates should be handled under UV free light; e.g., fluorescent tubes covered with amber sleeves.

Storage – Finished Plates

After printing, plates should be thoroughly cleaned with compatible solvent before storing. They may be stored on cylinders, sleeves or demounted and stored flat.

Technical Data		
	Cyrel® EASY ESE 45 Thickness 0.045 inch / 1.14 mm	Cyrel® EASY ESE 67 Thickness 0.067 inch / 1.70
Durometer	74-76 Sh A	63-65 Sh A
Image Reproduction	1–98% 190 lpi 75 l/cm	1–98% 190 lpi 75 l/cm
Minimum Positive Line Width	0.10 mm (4 mil)	0.10 mm (4 mil)
Minimum Isolated Dot Size	150 micron (0.15 mm)	200 micron (0.20 mm)
Relief Depth	0.60 mm	0.70 mm

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

DuPont de Nemours (Deutschland) GmbH

DuPont Electronics & Communications
Hugenottenallee 175
63263 Neu-Isenburg
Germany
Tel.: +49 (0) 6102 18 1592

DuPont (U.K.) Limited

DuPont Electronics & Communications
Wedgwood Way, Stevenage
Hertfordshire SG1 4QN
United Kingdom
Tel: +44 (0) 1438 73 4863

www.cyrel.eu