


# DuPont™ Cyrel® FAST VTA

## Thermal Process Analogue Plate for Varnishing

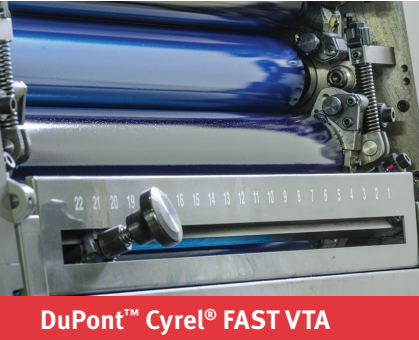

[DuPont Advanced Printing](#) brings together leading technologies and products for the printing and package printing industries. DuPont™ Cyrel® is one of the world's leading flexographic platemaking systems in digital and conventional formats, including [DuPont™ Cyrel®](#) brand photopolymer plates ([analogue and digital](#)), [Cyrel® platemaking equipment](#), [Cyrel® round sleeves](#), Cyrel® plate mounting systems and the revolutionary [Cyrel® FAST thermal system](#).

DuPont™ Cyrel® Systems: Higher quality at high speed.

**The DuPont™ Cyrel® VTA plates are ideal for varnishing and special effect ink and coatings applications.**

### DuPont™ Cyrel® FAST VTA

#### Applications

Cyrel® VTA plates offer high quality print finishing on folding cartons, such as food packaging, cigarettes, cosmetics, etc. They are also used in commercial printing for spot coating of catalogues, calendars, books and brochures.

Cyrel® VTA plates can be used for inline and offline coating of:

- Aqueous coating
- UV-Lacquer
- Metallic ink

#### Product Features

Excellent coating and ink transfer permits superior coating

- High resolution and exact register results in fine detail and complex forms can be spot coated and printed in the coating tower
- High durability for long print runs
- Image relief is clean and sharp
- Can be used again and again without any loss of registration

#### Printing Ink and Solvent Compatibility

Cyrel® VTA plates offer excellent compatibility with UV-lacquers and water-based inks. The enforced polyester base will maintain accurate registration even with large plates.

#### Platemaking

The Cyrel® FAST thermal developer allows the production of Cyrel® FAST finished plates in less than one hour, making it the ideal just-in-time platemaking system for a market that demands quick turnaround at the highest possible quality. The Cyrel® FAST thermal developer delivers outstanding plate quality and uniformity. This processor has the ability to produce a finished plate without solvent washout. The Cyrel® ECLF for exposing and light finishing plates is available to complement the Cyrel® FAST thermal developer.

#### Process of Use

DuPont™ Cyrel® VTA is designed to work with Cyrel® FAST thermal platemaking processors. Expose the plate through the back to establish the floor and maximize sensitivity. Back exposure varies according to relief required. Remove the protective coversheet and expose the front of the plate through the negative film to form the image. Negative films should have a high matte surface. Process the plate in the Cyrel® FAST thermal processor. Finish the plate in a light finisher to eliminate surface tackiness. Post-expose the plate to ensure complete polymerisation.

# DuPont™ Cyrel® FAST VTA

## Thermal Process Analogue Plate for Varnishing

### Storage – Raw Material

Store unexposed plates in a cool area (4–32°C, 40–90°F), away from direct sources of heat. Humidity control is not required. Cyrel® VTA is foam interleaved to provide maximum protection of the plate after manufacture, and during transportation and storage. Plates should be stacked flat. Plates should not be exposed to direct sunlight or excessive white light. Continuous exposure to very high ozone concentrations should be avoided.

### Handling – Raw Material

Like all photopolymer plates, Cyrel® VTA plates should be handled under UV free light; e.g. fluorescent tubes covered with amber sleeves.

### Storage – Finished Plates

After printing, plates should be thoroughly cleaned with a compatible solvent before storing. They may be stored on cylinders, sleeves or demounted and stored flat.

Technical Data	
	<b>Cyrel® FAST VTA Thickness 1,14 mm/0,045 inch</b>
Durometer	73 Sh A
Image Reproduction	2–95% / 48 L/cm
Minimum Positive Line Width	0,25 mm
Minimum Isolated Dot Size	250 µm
Relief Depth	0,4–0,5 mm / 0,016–0,020 inch
Processing	Thermal / Analogue

[www.cyrel.eu](http://www.cyrel.eu)

For more information on DuPont™ Cyrel® or other DuPont Advanced Printing products, please contact your local representative.

**DuPont de Nemours (Deutschland) GmbH**  
Tel: +49 (0) 6102 18 1592

**DuPont (U.K.) Limited**  
Tel: +44 (0) 1438 734000