


DuPont™ Cyrel® 2000 PS

State-of-the-Art Processor



[View Hi Res Image](#)

DuPont™ Cyrel® 2000 PS

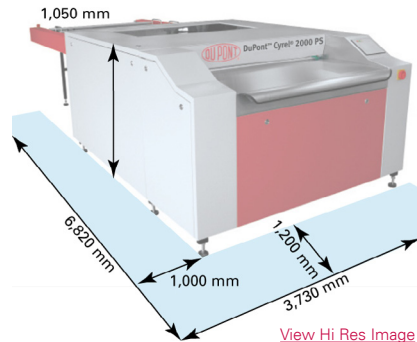

[View Hi Res Image](#)

Floor Plan



Play Video



Download latest version

[DuPont Packaging Graphics](#) continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates ([analogue](#) and [digital](#)), Cyrel® platemaking equipment, [Cyrel® round sleeves](#), [Cyrel® plate mounting systems](#) and the revolutionary [Cyrel® FAST thermal system](#).

DuPont™ Cyrel® Systems: Higher quality at high speed.

The DuPont™ Cyrel® 2000 PS is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

DuPont™ Cyrel® 2000 PS

Benefits

- Maximum plate size 1,070 x 2,000 mm (42" x 78")
- Increased productivity
- Minimal floor space
- Innovative washout process
- High dot resolution and fine line definition
- Integrated viscosimeter
- Robust and easy to support

Product Features

DuPont™ Cyrel® 2000 PS is capable of processing high quality photopolymer plates up to a format of 1,070 x 2,000 mm (42" x 78"). High dot resolution, excellent line definition, deep reverses and clean floor are achieved to meet the highest Flexo standard irrespective of whether thick, thin, narrow or large plates are being processed.

An innovative washout concept consisting of eight flat brushes transverse to each other, and nine contra-

rotating round brushes wash out the non-polymerised parts of the plate. Cleaning takes place through contra-rotating round brushes moistened with fresh solvent, clearing the plate of washout solution.

At the exit section, the plate is pulled over a rotating plush surface and pre-dried. At the same time the relief side can air dry.

The solvent temperature is programmable between 20°C to 40°C (68°F to 104°F) to handle different brands of solvents available to the industry. The speed at which the plates pass through can be preset to adapt to the individual plate types. The integration of fresh solvent is controlled via a viscosimeter, which is constantly monitoring the solvent saturation during the entire process. The unit is operated and controlled through a large colour touch screen panel. The computer control board may store up to 21 different washout plate programs.

DuPont™ Cyrel® 2000 PS

State-of-the-Art Processor

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 2000 PS	Incremental solvent processor
SAP Article Number	D14897277	
Plate Thickness	0.5 mm to 7.0 mm	0.019" to 0.27"
Max. Nominal Plate Width	1,070 mm (42")	
Min. Nominal Plate Width	200 mm (7.9")	
Max. Nominal Plate Length	2,000 mm (78.7")	
Fresh Solvent Tank	19 litres (4.2 Gal) UK	
Min. Solvent Volume for Operation	70 litres (15.4 Gal) UK	
Max. Solvent Volume for Operation	90 litres (19.8 Gal) UK	
Max. Tank Volume	115 litres (25.3 Gal) UK	
Electrical (Field Configurable)	380 / 400 Volt–50/60 hz; 220 / 230 Volt–50/60 hz	3Ph / N / PE; 3Ph / PE
Power (nominal)	7 kW	
Current (Nominal Load)	16 Amp @ 400 Volt; 25 Amp @ 230 Volt	
Connecting Wires	400 Volt configuration; 230 Volt configuration	5 x 2.5 mm ² ; 5 x 2.5 mm ²
Grounding	≤ 0.1 Ω	Ground bar to equipment frame and to electrical supply ground
Exhaust (Light Finisher)	Ø 100 mm (3.9")	200 m ³ / h–117.7 scfm
Environmental Data	Temperature range: 15°C to 30°C (59°F to 86°F)	Relative humidity from 40% to 60% non-condensing
Compressed Air Supply	6 bar minimum	200 l / min–423.8 ft ³ / hour
Dimensions	Uncrated	Crated
L	4,420 mm (174.0")	4,850 mm (190.9")
W	1,730 mm (68.1")	2,040 mm (80.3")
H	940 mm (37.0")	1,600 mm (62.9")
Weight	1,190 kg (2,624 lbs)	1,740 kg (3,836 lbs)
Colour	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

www.cyrel.eu

DuPont de Nemours (Deutschland) GmbH
 DuPont Electronics & Communications
 Hugenottenallee 175
 63263 Neu-Isenburg, Germany
 Tel: +49 (0) 6102 18 1592

DuPont (U.K.) Limited
 DuPont Electronics & Communications
 Wedgwood Way, Stevenage
 Hertfordshire SG1 4QN, United Kingdom
 Tel: +44 (0) 1438 73 4863